

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Original corner not previously established.



P-3

Description of corner evidence

No original corner evidence exists.

Corner Monumentation

At position determined by survey, set a 5/8" X 30" long iron rod 28 inches in ground with 2" aluminum cap stamped as shown.


Reference Monuments

Set 5/8"x30" iron rod with a yellow plastic cap marked "ARMSTRONG SURVEYING" bears North 81°00'27" East a distance of 7.51 feet; Set 5/8"x30" iron rod with a yellow plastic cap marked "ARMSTRONG SURVEYING" bears South 27° 28'54" East a distance of 9.44 feet; Set 5/8"x30" iron rod with a yellow plastic cap marked "ARMSTRONG SURVEYING" bears South 26°29'46" West a distance of 10.90 feet; Set 5/8"x30" iron rod with a yellow plastic cap marked "ARMSTRONG SURVEYING" bears North 41°07'25" West a distance of 18.70 feet.


I hereby certify that the above corner monument was established as herein described on December 20, 2022.

Witnesses

Gus Gonzalez
John Owens

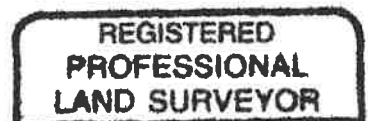

Todd R. Catterson

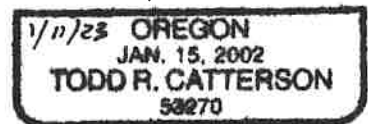

Office of Surveyor, County of Umatilla, State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 18th day of January, 2023.

COUNTY SURVEYOR

P-3

23-006-B