

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

STA. NAME: 9329

QUARTER SECTION: SW

GEODETIC COOR: NAD 83(91)

SEC. 23 TWP.4 N,RGE.28E  
UMATILLA CO.ORE.

LAT: 45°48'26.47947" N

DATE SET: JULY ,1993

LONG: 119°17'17.78781" W

SURVEYOR: WALTER L. CASWELL  
PLS 737

SP. COOR: NAD 83(91)

N: 782772.855 INT.FT.

FIRM: EAGLE GPS SURVEY CORP  
13545 NW SCIENCE PARK DR  
PORTLAND, OR. 97229  
(503) 643-1073

E: 8511095.385 INT.FT.

THETA: 0°51'33.619"

TYPE: GPS

SCALE FACTOR: 0.999956727

ORDER: SECOND, CLASS: 1

ELEV: 629.648 US.FT.

ELEV. DATUM: NGVD 29


\*\*\*\*\*  
DIRECTIONS "TO REACH"

FROM INTERSECTION OF FEEDVILLE ROAD AND HERMISTON-HINKLE ROAD AT SECTION CORNER FOR 14, 15, 22, 23, GO EAST ON FEEDVILLE ROAD 0.11 MILE TO POST 25, THEN NORTHERLY 0.1 MILE CROSS COUNTRY AT EAST SIDE OF CANAL TO MONUMENT.

STATION IS A 5/8" X 30" IRON ROD WITH A YELLOW PLASTIC CAP INSCRIBED "BUFORD ASSOC. PLS 1148".

STATION IS 25 FEET EAST OF CANAL AT BEND.

METERS X 3.28083333333 = U.S. FEET  
METERS X 3.28083989501 = INTERNATIONAL FT.

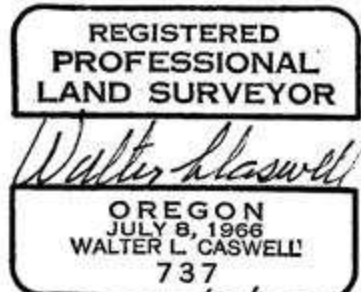

EXP. 12/31/93