

**OREGON CORNER RESTORATION FORM**

Section 18 Township 1N Range 32E  
 County Umatilla Date: September 18, 2009

Corner Designation: 1N32L5

Condition Report Only  
 Not found

Quarter corner common to sections 17 and 18,  
 T1N, R32E, W.M., Umatilla County, Oregon.


Remonumented  
 Unrecorded  
 Surveyed in  
 Referenced out

Previous Renewals / Surveys, etc.

Corner originally set by Daniel Chaplin under contract No. 107 Dated September 21, 1864.  
 His record reads: Set post for 1/4 section corner in mound of earth with charred stake,  
 pits, etc., as per instructions. In survey 06-140-B, Stephen K. Haddock proportioned the corner  
 point but did not monument it.

Monument and Accessories found: ( condition and source )

None. The point falls in a plowed field. The old fence that was in this location in survey 06-140-B  
 has been removed.

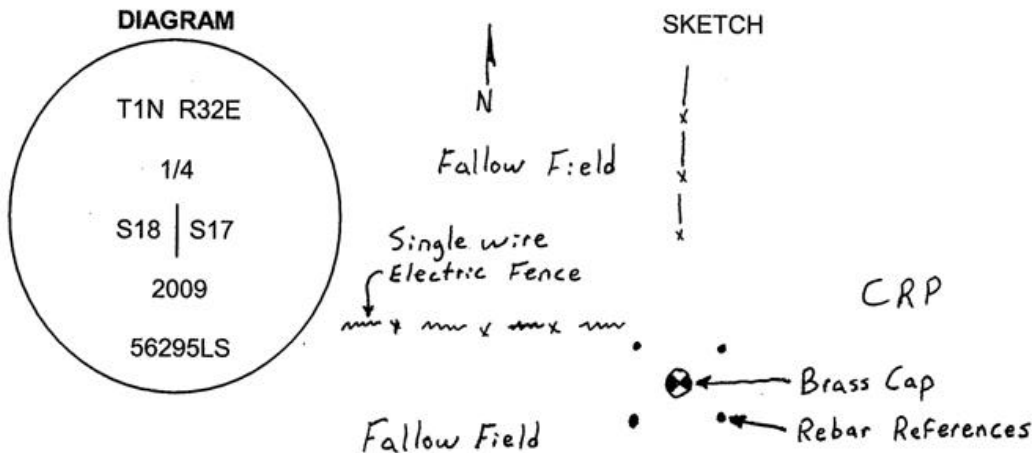

**MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)**

Set a 1 1/2" x 30" galvanized iron pipe with a 2 1/2" brass cap stamped as shown in the diagram  
 above at the point from survey 06-140-B.

For references, I set four 5/8" by 24" iron rebars with 1 1/4" orange plastic caps stamped WTS  
 and 56295LS as described below:

- an iron rebar bears N47°22'58"W, 34.36 feet, 2 feet below the surface;
- an iron rebar bears N40°44'36"E, 31.15 feet, 2 feet below the surface;
- an iron rebar bears S41°35'48"E, 34.19 feet, 2 feet below the surface;
- an iron rebar bears S33°48'27"W, 33.23 feet 2 feet below the surface;

The monument was set and references tied using a Trimble R7/R8 RTK GPS system.

Location and comments  
 NAD 83/1991 State Plane Coordinate  
 Oregon North Zone  
 N = 696,760.93 ift  
 E = 8,624,970.05 ift

Compass Declination

Surveyors Seal

RECEIVED BY:  
Umatilla County Surveyor  
 Date: 6-10  
 Rec'd By: KK  
 No. 10-63-C

Witness Tree Surveying  
 Address  
 P.O. Box G  
 Pilot Rock, OR 97868  
 Party Chief  
 Stephen K, Haddock

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Stephen K. Haddock*

OREGON  
 JULY 9, 2001  
 STEPHEN K. HADDOCK  
 56295LS

RENEWAL DATE 6-30-11