

OREGON CORNER RESTORATION FORM

Section 28,27 Township 3N
County Umatilla Date: 08/09/10

Range 29E

Corner Designation: 3N29T13

Corner common to sections 27,28 T3NR29E.

Condition Report Only
 Not Found
 Remonumented
 Unrecorded
 Surveyed In
 Referenced Out


Previous Renewals / Surveys, etc.

Originally Surveyed by Gates. He set a post in a mound of earth in 1859.


Monuments and Accessories Found: (Condition and Source)

None.

Diagram



Sketch

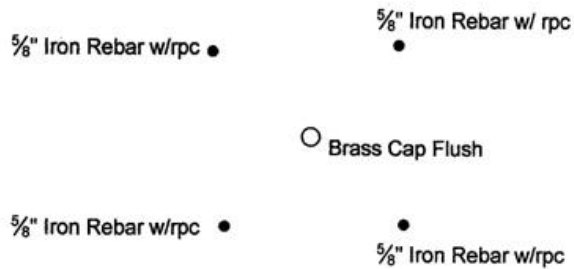

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N748302.29
E8538243.36

LAT - 45° 42' 41.999773" N
LON - 119° 11' 02.51353" W

Monument (s) Set (Procedures and Description)

A 1 1/2" x 30" Galvanized iron pipe w/ a 2 1/2" Brass capped monument flush with the surface, stamped as shown above. SFP guard post S of mon. Set by single proportion.

References Set:

- A 5/8" Iron rebar w/rpc #43406 flush, lies N 49°45' W, 16.19'.
- A 5/8" Iron rebar w/rpc #43406 flush, lies N 45°20' E, 14.35'.
- A 5/8" Iron rebar w/rpc #43406 flush, lies S 40°30' E, 14.55'.
- A 5/8" Iron rebar w/rpc #43406 flush, lies S 44°40' W, 17.32'.

Location and Comments

Corner is on a barren ridge S of Piercy's Vineyard.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert Douglas English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RECEIVED BY:

Date: 8-10
Rec'd By: RR
No. 10-144-R

Firm / Agency

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055

RENEWAL DATE: 12/31/11