

**OREGON CORNER RESTORATION FORM**

COUNTY: Umatilla DATE: 2/15/16

CORNER DESIGNATION: P-3, The Center Quarter Corner of Section 19, Township 3 North, Range 31 East, W.M.

PREVIOUS RENEWALS/SURVEYS ETC.: None.

MONUMENT AND ACCESSORIES FOUND: None. Calculated the corner position on the parallel of latitude holding the quarter corners North, South, East, and West. See Record of Survey Map filed concurrently with this certificate.

**MONUMENT MARKING DETAIL:**

T3N R31E  
C1/4 S19  
2016  
PLS 54657

MONUMENT SET: At the corner point set a 2 3/8" brass cap on 1 1/4"x30" galvanized steel pipe with top 12" below gravel road surface. Monument marked as shown in "Monument Marking Detail".

**From which:**

A silver Deep-1 magnet buried 20" in the ground in a farmed field bears North 39° East, 33.7 feet.

A pink Deep-1 magnet buried 20" in the ground in a farmed field bears South 48° East, 28.1 feet.

A blue Deep-1 magnet buried 20" in the ground at the edge of the road bears South 50° West, 27.8 feet.

An orange Deep-1 magnet buried 20" in the ground in a farmed field bears North 41° West, 37.9 feet.

Buried bearing object tags with magnets.


LOCATION AND COMMENTS: Corner is located in Yoakum Road 3' +/- Westerly of the visual centerline of the road. See Survey Map filed concurrently with this certificate for further information.

FIRM: Wells Surveying  
P.O. Box 1696  
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

/3N31P3

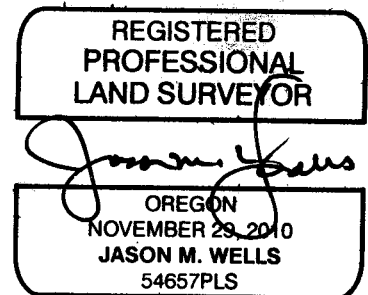

RENEWS: 6:30:16

16-030-B