

**OREGON CORNER RESTORATION FORM**

COUNTY: Umatilla DATE: 07/11/13

CORNER DESIGNATION: 3N32, N03, The North One-Quarter Corner of Section 19.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Chaplin, under GLO Contract dated September 1864, notes state: Set post for 1/4 Sec. corner in mound of Earth with charred stake, pits, trench &c as per instructions. F.B. Hayes indicates he set a 1" I.P. in his undated Survey Q-521-C. John Shea of JUB Engineers, Inc. computed a position for this corner on Survey 12-126-B, but no monument was set.

MONUMENT AND ACCESSORIES FOUND: None. The 1" iron pipe indicated on Survey No. Q-521-B was searched without success.

MONUMENT MARKING DETAIL:

T3N R32E  
1 S18  
4 S19  
2013  
PLS 54657

MONUMENT SET: At point calculated by JUB, the reestablished position, set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe, with cap 12 inches below dirt field road, stamped as stated in "Monument Marking Detail", from which:

- A silver deep 1 magnet buried 20" below ground surface bears North 42° East, 20.2 feet.
  - A purple deep 1 magnet buried 20" below ground surface bears South 43° East, 24.5 feet.
  - A blue deep 1 magnet buried 20" below ground surface bears South 42° West, 30.3 feet.
  - An orange deep 1 magnet buried 20" below ground surface bears North 41 1/2° West, 37.4 feet.
- Buried bearing object tags with all magnets.

LOCATION AND COMMENTS: Located at the intersection of Howdyshell Road and a County Road running North.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N= 757417.05'  
E= 8620988.35'


FIRM: Wells Surveying  
P.O. Box 1696  
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS  
Dean Roy

\3N32N03

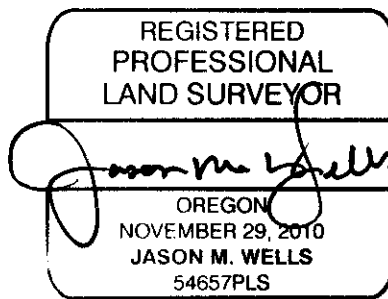

RENEWS: 6-30-14