

OREGON CORNER RESTORATION FORM

Section: 1, 36 Township: 3N, 4N Range: 33E
County: Umatilla Date: 2/14/2011

Corner Designation: 3N33A23

Quarter corner common to Sections 1, T3NR33E; 36, T4NR33E.

<input checked="" type="checkbox"/>	Condition Report Only
<input type="checkbox"/>	Not Found
<input type="checkbox"/>	Remonumented
<input type="checkbox"/>	Unrecorded
<input type="checkbox"/>	Surveyed In
<input checked="" type="checkbox"/>	Referenced Out


Previous Renewals / Surveys, etc.

Originally surveyed by Thompson in 1864. He set a 17" x 10" x 5" stone.
In 1976 Krumbain set a brass cap by single proportion between road intersections.


Monuments and Accessories Found: (Condition and Source):

A 2 3/8" brass cap, stamped as shown below.
A 2 1/2" brass cap witness corner lies S 5° 45' E, 30.13'.

Diagram



Sketch

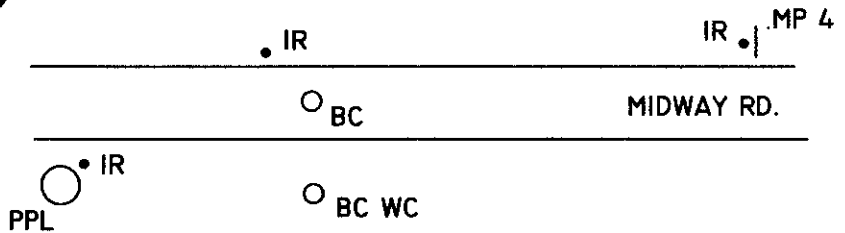

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N774487.26
E8678582.86

Monument(s) Set (Procedures and Description):

None.

References Set:

A 5/8" x 30" iron rebar w/RPC #43406 lies S 79° 50' W, 81.40', at a telephone pole.
A 5/8" x 30" iron rebar w/RPC #43406 lies N 47° W, 37.05'.
A 5/8" x 30" iron rebar w/RPC #43406 lies N 80° 30' E, 160.93', at Mile Post 4.

Location and Comments:

The corner lies 1/2 mile West of the intersection of Midway Rd. and Hales Rd.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RENEWAL DATE: 12/31/13

RECEIVED BY:

Date: 7/10/2012
Rec'd By: A. Pres
No. 12-094-C

Firm / Agency

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055