

**OREGON CORNER RESTORATION FORM**

Section: 35, 36      Township: 3N      Range: 33E  
 County: Umatilla      Date: 12/20/2011

Corner Designation: 3N33X21

Quarter corner common to Sections 35, 36, T3NR33E.

	Condition Report Only
X	Not Found
X	Remonumented
	Unrecorded
X	Surveyed In
X	Referenced Out


**Previous Renewals / Surveys, etc.**

Originally surveyed by in Chaplin 1864. He set a post in a mound of earth with charred stake and pits.  
 In 1871 Moody set a post in a mound of earth.  
 In 1887 Currin and Noland set a post in a mound of earth with pits North and South.


**Monuments and Accessories Found: (Condition and Source):**

None.

**Diagram**



**Sketch**

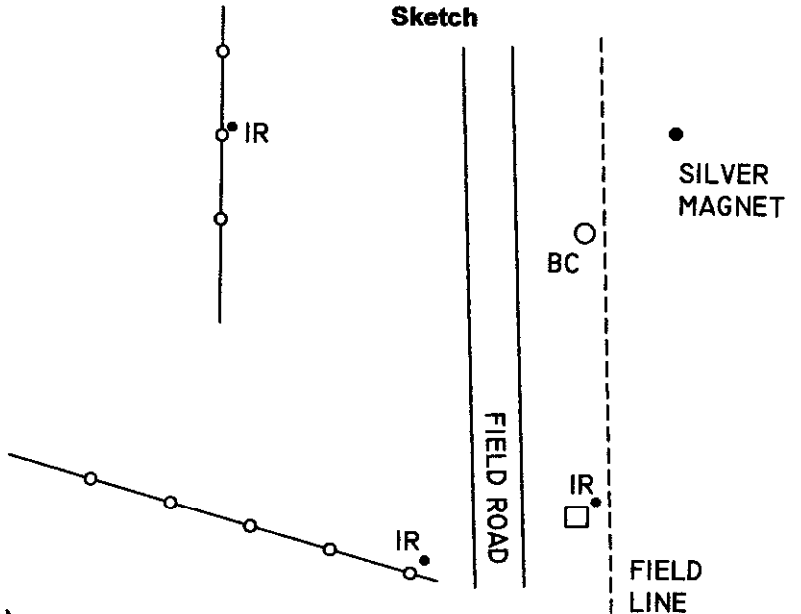

NAD 83/91  
 OREGON STATE PLANE NORTH  
 INTERNATIONAL FEET

N745318.67  
 E8676757.66

**Monument(s) Set (Procedures and Description):**

A 1 1/8" x 30" galvanized iron pipe with 2 1/2" brass cap, stamped as shown above, flush with the surface. The corner location was reestablished by single proportionate method between an accepted intersection North and a found monument South.

**References Set:**

- "Deep One" magnet by Bermtsen.
- A 5/8" x 30" iron rebar lies N 73° W, 76.52', at a steel fence post.
- A silver magnet lies N 42° 50' E, 27.52', 1.8' deep.
- A 5/8" x 30" iron rebar lies S 2° E, 56.04', at a wooden post.
- A 5/8" x 30" iron rebar lies S 26° 30' W, 163.18', at a steel fence post.

**Location and Comments:**

The corner is located 1/2 mile North and 1 mile West of the intersection of Kirkpatrick Rd. and North Cayuse Rd.

**Compass Declination**

17° E

**Surveyors Seal**

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Robert Douglas English*  
 OREGON  
 JANUARY 11, 2005  
 ROBERT DOUGLAS ENGLISH  
 43406LS

RENEWAL DATE: 12/31/13

**RECEIVED BY:**

Date: 7/10/2012  
 Rec'd By: [Signature]  
 No. 12-094-C

**Firm / Agency**

Survey One, LLC.  
 P.O. Box 382  
 Pendleton, OR 97801  
 (541) 276-2055