

Index

File No.

T. 3 N. R. 38 E.

Merid. WILLAMETTE

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

R.D. Walla Walla

N.F. UMATILLA

County UMATILLA

State OREGON


Tract or

Survey No. **NF Umatilla**

Cor.

No. **AP-365**

CORNER DIAGRAM

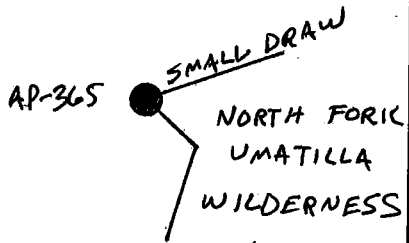

DESCRIBE CORNER MONUMENT FOUND

NONE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

NONE

PHOTO IDENTIFICATION DATA

Photo No.:

Filed At.:

Object Ident.:

Ident. By:

Signature

PLANE COORDINATE POSITION DATA

State: Oregon Zone: North

X: 2,617,287.19'

Y: 770,390.98'

Datum: NAD1927

DESCRIBE CORNER RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From the jct. of F.S. roads 3719 and 3719-070 travel southerly on road 3719-070 approx. 0.7 miles to a steel fence post, with a wilderness boundary sign, set in the center of the road. From this point ascend a small draw S. 55° W., 200 feet to the corner.

Signature

D. Schlaich

Title

Land Surveyor

Division

Headquarters

S.O.

Date

07/1996

FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set in a small draw at an elevation of 4800 feet a 5/8" by 24" rebar, with a 3 1/4" aluminum cap, 20" in the ground, mkd. "NFU WILDERNESS AP-365 RLS 2308 1996"

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

14" Western Larch, N. 87 1/2° E., 83.3 ft., mkd. "WB/365" "BT".

23" Englemann Spruce, S. 63 3/4° E., 26.9 ft., mkd. "WB/365" "BT".

BT's are double blazed and have a 3/4" brass washer mkd. "RLS 2308" nailed to the lower blaze by the "BT" scribing.

Work Done By **D. Schlaich**

Title **Land Surveyor**

Date **07/1996**

State Registration No.
or Agency

Certified Cor. Record Prepared ? **NO**

Filed At:

Date

REMARKS

Index File No.

T.

3 N.

R.

38 E.

M.

W.M.

Tract or Survey No.

NF Umatilla

Cor.

AP-365