

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N - 5  
DIAGRAM

History of original corner establishment:

The original corner was established by George S. Pershin on September 16, 1879, under GLO contract No. 332, as follows:

Set a basalt stone, 20" x 12" x 8", and a post in a mound of stones, on east face of hill for corner to sections 17, 18, 19 and 20.



Original corner evidence recovered:


Found the original corner stone solidly set on the southwest edge of a mound of stones. The original corner stone is 22" x 12" x 10" and is plainly marked with three notches on the north edge near the top of the stone. The original post called for in the notes is gone.

Monument and accessories established to perpetuate the original position of this corner:

In place of the corner stone, I set a 1" x 18" flared, galvanized iron pipe 16" into the ground to bedrock. I bury the corner stone along the southwest side of the pipe and build a mound of stones around the pipe. A 2 1/2" brass cap attached to the top of the pipe is marked as shown in the diagram above, from which:

- A 5/8" x 24" iron rod set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 17", attached at ground level, bears N16° E, 97.1 feet.
- A 5/8" x 18" iron rod set 17" into the ground with a 3/4" brass washer, marked "PLS 1636 20", attached at ground level, bears S56° 30' E, 97.0 feet.
- A 5/8" x 24" iron rod set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 19", attached at ground level, bears S49° W, 120.1 feet.
- A 5/8" x 24" iron rod set 22" into the ground with a 3/4" brass washer, marked "PLS 1636 18", attached at ground level, bears N69° W, 86.4 feet.

I hereby certify the above corner point was perpetuated as hereon described on February 8, 2005. Magnetic declination set in compass: 16° E.  
NAD '83 UTM Zone 11 position: 5018335N, 333381E (plus or minus two meters).

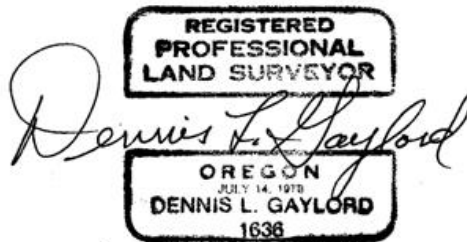

Renews June 30, 2005

Recorded at the office of County Surveyor, County of Umatilla, State of Oregon, on:

RECEIVED BY  
Umatilla County Surveyor  
Date 2-05  
Sud'd by KK  
No. 02-29-R