

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

COUNTY: UMATILLA


DATE: DECEMBER 22, 2021

CORNER DESIGNATION: N-21, SECTION CORNER COMMON TO SECTIONS 13/14/23/24, T 4N, R 28E, W.M.

N-21
T. 4N, R. 28E, W.M.

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

ORIGINALLY A POST IN MOUND SET BY TAFT IN 1860 UNDER CONTRACT NO. 93. IN 1973 KRUMBEIN SET A 2 1/2" BRASS CAP. THIS MONUMENT WAS FOUND AND LOCATION RECORDED FOR REPLACEMENT AFTER ROAD CONSTRUCTION.

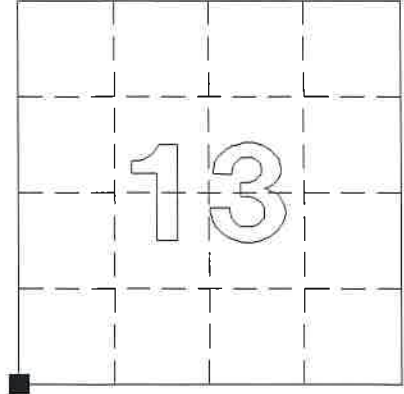


DESCRIPTION OF MONUMENT FOUND:

A BRASS CAP MARKED "T4N R28E, 13/14/23/24, PLS 933" PER UMATILLA COUNTY SURVEY NO. 92-045-C (OREGON CORNER RESTORATION FORM FOR CORNER N-21) WAS FOUND PRIOR TO ROAD CONSTRUCTION. A 2 1/2" COPPER CAP MARKED AS SHOWN BELOW ON 5/8" X 30" COPPER CLAD ROD WAS SET AFTER CONSTRUCTION IN SAME LOCATION.

DESCRIPTION OF ACCESSORIES ESTABLISHED:

NEW ACCESSORIES:

- A 5/8"x30" IRON ROD WITH ALUMINUM CAP, MARKED "APA RM 49593PLS", BEARS N45°01'09"W, 40.00'
- A 5/8"x30" IRON ROD WITH ALUMINUM CAP, MARKED "APA RM 49593PLS", BEARS N45°00'18"E, 39.98'
- A 5/8"x30" IRON ROD WITH ALUMINUM CAP, MARKED "APA RM 49593PLS", BEARS S44°58'25"E, 40.02'
- A 5/8"x30" IRON ROD WITH ALUMINUM CAP, MARKED "APA RM 49593PLS", BEARS S44°58'22"W, 40.01'

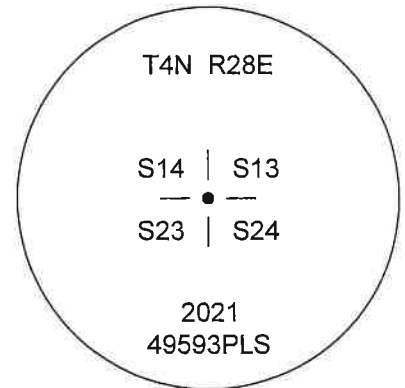

SPCS OREGON NORTH (International Feet)

Northing: 787580.20
Easting: 8515812.75

WITNESS:

- CASEY BOYD, SURVEY PARTY CHIEF

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
FEBRUARY 8, 2000
RICHARD E. STEIN
49593PLS

RENEWAL DATE: 06/30/2022

ap anderson
perry
& associates, inc.

ANDERSON PERRY & ASSOCIATES, INC.
1901 N. FIR STREET
LA GRANDE, OR 97850
(541) 963-8309

22-015-8