

OREGON CORNER RESTORATION FORM

SECTION 23 TOWNSHIP 4 NORTH RANGE 29 EAST N-21
COUNTY : UMATILLA DATE 8-98

CORNER DESIGNATION

NE CORNER

CONDITION REPORT ONLY
 NOT FOUND
 RENEWED
 UNCOVERED
 SURVEYED IN
 REFERENCED

PREVIOUS RENEWALS / SURVEYS, ETC.


ORIGINALLY SURVEYED IN 1861 BY DAVENPORT UNDER CONTRACT #101. HE SET A POST IN A MOUND OF EARTH AND A CHARRED STAKE. ALSO TUTTLE FOUND 17" X 12" X 10" STONE IN 1991 SURVEY, COUNTY #91-109-B.

MONUMENTS AND ACCESSORIES FOUND: CONDITION AND SOURCE

20" X 11" X 7" STONE 1 FOOT BELOW THE SURFACE.

SKETCH

MONUMENT DETAIL

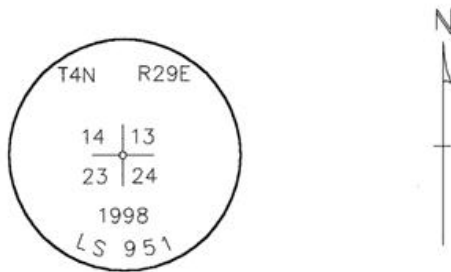

MONUMENT SET (PROCEDURES AND DESCRIPTION)

MOVED STONE TO THE NORTH AND IN ITS PLACE I SET A 2 3/8" BRASS CAP, 3" ABOVE THE SURFACE STAMPED AS ABOVE.

NEW ACCESSORIES FROM WHICH

A 5/8" X 30" IRON REBAR WITH PLASTIC CAP #951 LIES N 89°.59'00" E, 12.70 FEET.
A 5/8" X 30" IRON REBAR WITH PLASTIC CAP #951 LIES S 0°.16'26" W, 23.53 FEET.
A 5/8" X 30" IRON REBAR WITH PLASTIC CAP #951 LIES N 89°52'22" W, 13.44 FEET.
AN ALUMINUM TAG #951 IN A ROUND FENCE POST LIES S 89°.34'40" W, 47.80 FEET.

LOCATION AND COMMENTS

COMPASS DEC.

SURVEYOR'S SEAL

FIRM/AGENCY
EDWARDS SURVEYING
P.O. BOX 763
HERMISTON, OREGON 97838
97838

PARTY CHIEF
D. EDWARDS

NOTES

WITNESS
RICK SMITH

RECEIVED BY
Umatilla County Surveyor
Date 10-98
Rec'd By KS
No. 98-213-C

REGISTERED
PROFESSIONAL
LAND SURVEYOR

G. Dennis Edwards

OREGON
JULY 16, 1971
G. DENNIS EDWARDS
951
RENEWS 12/31/99