OREGON CC NER RESTORATION FORM

Section 31 Township 5N Range 31E
County Umatilla Date: 11-05-2006

Corner Designation: 5N31E Z4

____	Condition Report Only
____	Not Found
____	Remonumented
___X___	Unrecorded
___X___	Surveyed In
___X___	Referenced Out

Previous Renewals / Surveys, etc.

08-1865 W.Odell/Lewis STD PARALLEL (110) Only sets 1/4 corners.
12-1874 N.Walden Resurvey (209) Only sets 1/4 corners.
05-1980 W.Kimmel BLM (83-195-B) East - West line indicated only
05-2006 D.Haddock (06-263-C) East - West line indicated only

Monument and Accessories Found: (condition and source)

No monument set.

DIAGRAM

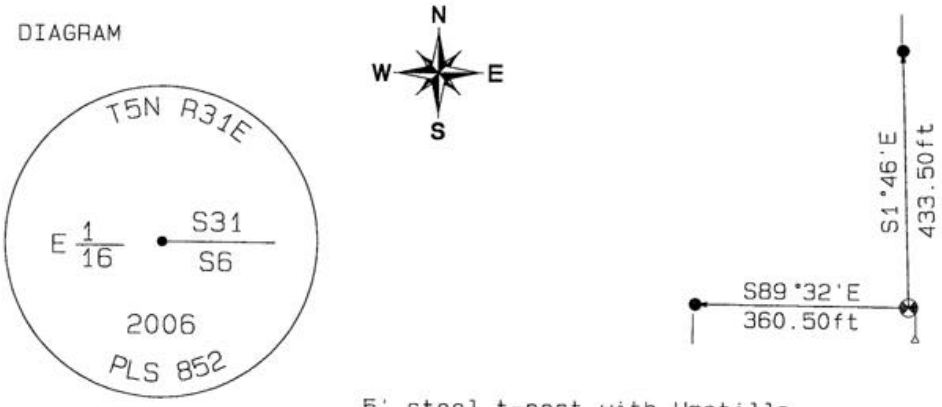

5' steel t-post with Umatilla County Survey Monument sign

5ft steel T-post

5/8"dia. x 30" long Iron Rebar with a 1.3"dia. Red plastic cap.

Set 2"dia. Aluminum cap on a 5/8" x 30" long Iron Rebar.

MONUMENT(S) AND ACCESSORIES SET (Procedures and Description)

Set a 2"dia. Aluminum Capped monument (stamped as shown) on a 5/8"OD x 30"long Iron rebar 2" above the ground surface
Set a 5' steel T-post with a Umatilla County Survey Marker sign 6" South of the monument .

REFERENCES SET:

Set two (5/8" dia x 30" long Iron rebar with a 1.3" dia. Red plastic cap) to the bearings and distances from monument shown above in the sketch.

Made GPS tie to TRI Stations
LAURILA RESET RB 1379 and
WALLS RB 1396
Latitude 45 °51'48.48442"N
Longitude 118°58'46.53531"W
NAD 83(1991)

Oregon State Plane Coord. - North Zone
Northing 804547.58
Easting 8589419.36
Ortho Height 1112.61
Ellipsoidal Height 1043.60

Location and Comments

Compass Declination
18°E

Surveyors Seal

Proceed from the junction of HWY 37 and South Cold Springs Highway Southeast on S. Cold Springs Hwy (Umatilla County Rd # 850) approximately 1.56 miles. Thence 100 feet Northeast up the hill to the corner.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David L. Haddock

OREGON
JULY 12, 1968
DAVID L. HADDOCK
852

RENEWS 6-30-07

RECEIVED BY:

Date 02-07
Rec'd By: DHH
No.: 07-215-R

Firm / Agency

Haddock Surveying
P. O. Box 1574
Pendleton, OR 97801
(541) 276-2174