

Index

File No. X-12

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No. 116


T 4N R. 38E

R.D. Walla Walla County Umatilla

Merid. will

N.F. Umatilla State OR

CORNER DIAGRAM

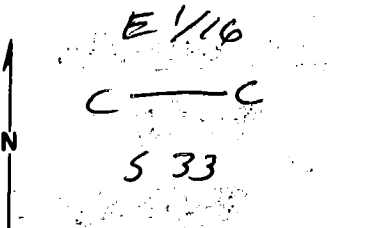

DESCRIBE CORNER MONUMENT FOUND

NONE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

NONE

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

Title

Division

Headquarters

Date

7100-52 (3. 68)

G. Dennis Edward

LS 951

Hermiston

7/14/85

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From Jct. Rd #6401 with #64

GO East on Rd #64 0.7 mile

Corner lies 1600' south of 54-6 sign on wood post.

Corner lies 200' ± south of creek

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

set 2" x 30" Iron pipe with 2 1/2" Brass cap stamped
 20" in the ground & placed stones to top
 drove steel fence post 3' North and attached 54-9 sign

CE 1/16 S 33
 1985
 LS 951

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

a 7" ^{Lodgepole} pine bears N 82°W 11.0 ft scribed. CE 1/16 S 33 BT
 a 11 Fir bears N 87°E 3.2 ft scribed CE 1/16 S 33 BT
 Alum tag stamped 951 nailed to Bottom Blaze. Blaze painted Red
 painted red Band around BT's & nailed 54-3 & 54-9 signs on.

Work Done By G.O. Edwards Title LS Date 7/19/85 State Registration No. OR 951
 or Agency
 Certified Cor. Record Prepared? Yes No Filed At: Pendleton OR Date 7/19/85

REMARKS