

Index  
File No. B-20

**CORNER RECORD (SEARCH)**

(Ref. FSM 7151.4)


Tract or  
Survey No. \_\_\_\_\_ No. \_\_\_\_\_

T 6S. R. 30E.

R.D. Ukiah County Umatilla

Merid. Willamette

N.F. Umatilla State Oregon

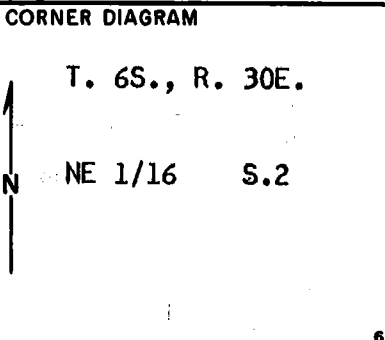

**DESCRIBE CORNER MONUMENT FOUND**

None  
*Set brass cap*

**DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND**

None

**PHOTO IDENTIFICATION DATA**

Photo No. \_\_\_\_\_  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
*Signature*

**DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER**

From intersection of U.S. Forest Roads 419N and 537N, go East by South about 2.6 miles, then turn left and go East 0.7 miles, then walk North West 18.00 chns. to corner.

**PLANE COORDINATE POSITION DATA**

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
*Agency*

*Signature*  
*David H. Klein*

Title \_\_\_\_\_ Division OPLS Headquarters 933 Date 7-77  
7100-52-(3/68)

## CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" x 30" iron piep with brass cap.

NE 1/16 S.2

Pipe is 18" in ground.

Mound of stones to cap.

1977

Stamped:

PLS 933

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A 10" pine S. 45°14' E. 67.5 ft.

A 10" pine S. 42°07' W. 68.2 ft.

Set steel fence post 3 ft. West of corner w/sign.

Painted red band around BT trees w/sign.

Work Done By T. Hamby Title Party Chief Date 6/23/77 State Registration No. or AgencyCertified Cor. Record Prepared? Yes  No  Filed At: \_\_\_\_\_ Date \_\_\_\_\_

REMARKS