

Index

File No. Z-25

**CORNER RECORD (SEARCH)**

(Ref. FSM 7151.4)

Tract or

Survey No. \_\_\_\_\_

Cor.

No. \_\_\_\_\_

T 2N R. 36E

R.D. Walla Walla


County Umatilla

Merid. Willamette

N.F. Umatilla

State Oregon

**CORNER DIAGRAM Sec.36**



**DESCRIBE CORNER MONUMENT FOUND**

Basalt stone 21x16x10- 6 notches East & West & North & South.

**DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND**

Orig. 18" Fir now 24" shattered Wh. Fir stub-N32E-18 lks. partial scribing visible.  
Orig. 20" Fir now 28" Wh. Fir snag 20 ft. tall S18E-23 lks. scribing visible on previously opened double blaze.

**PHOTO IDENTIFICATION DATA**

Photo No. 1280-49  
Filed At. Umatilla N.F.  
Object Ident. two I.P.'s  
Ident. By L. [Signature]  
*Signature*

**DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER**

From the signed wood post where the East line of Section 36 crosses Rd. #3128 go South 350 ft. to corner.

**PLANE COORDINATE POSITION DATA**

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
*Agency*

*Larry V. [Signature]*

Title Land Surveyor Division \_\_\_\_\_

Headquarters \_\_\_\_\_

Date 6/83 7100-52-(3.68)

**CORNER RECORD (PERPETUATION)**

**MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT**

Set 2½" x 30" Aluminum pipe with a 3" Aluminum cap and a breakaway footplate containing a magnet in a mound of stone.

**ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE**

13" Spruce N71-3/4W-21.5 ft. scribed T2NR36ES36BT and with a 1" Brass disk stamped PLS 896.  
11" Spruce S53W-15.0 ft. scribed T1NR36ES1BT and with a 1" Brass disk stamped PLS 896.  
14" Spruce N49E-18.7 ft. scribed T2NR37ES31BT and with a 1" Brass disk stamped PLS 896.  
8" Wh.Fir S81½E-10.2 ft. scribed T1NR37ES6BT and with a 1" Brass disk stamped PLS 896.

Work Done By Larry D. Bishop Title Surveyor Date 6/83 State Registration No. 896  
or Agency

Certified Cor. Record Prepared ? Yes No  Filed At: \_\_\_\_\_ Date \_\_\_\_\_

**REMARKS**


Set guard posts North & West with signs 54-2 and 54-4.  
Nailed 54-4 and BT signs to BT's and painted band and blazes red.

Index File No. Z-25  
T 2N R. 36E  
Merid. Will.

CORNER RECORD (SEARCH)  
(Ref. FSM 7151.4)  
R.D. WALLA WALLA County UMATILLA  
N.F. UMATILLA State OREGON

Tract or Survey No. \_\_\_\_\_  
Cor. No. \_\_\_\_\_

CORNER DIAGRAM

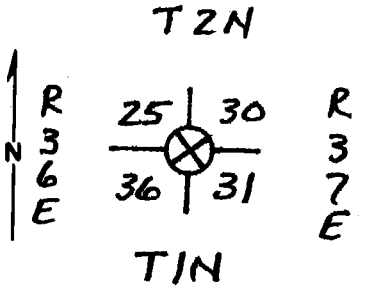

DESCRIBE CORNER MONUMENT FOUND  
STONE SET SOLIDLY IN PLACE & MARKED WITH 6 NOTCHES ON ALL 4 CARDINAL EDGES.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND 2  
A SHATTERED FIR STUMP w/ UPPER BLAZE PREVIOUSLY OPENED & SCRIBING VISIBLE & A HEALED LOWER BLAZE BEARS N 32° E, 11.9 FT.

A 25' HIGH FIR SNAG w/ UPPER BLAZE PREVIOUSLY OPENED & SCRIBING VISIBLE & A HEALED LOWER BLAZE BEARS S 18° E, 15.2 FT. OTHER TWO BT'S GONE. 3

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER  
200' SOUTH OF BLACK MT. Rd.

PHOTO IDENTIFICATION DATA

Photo No. \_\_\_\_\_  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
*Signature* \_\_\_\_\_ 7

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
*Agency* \_\_\_\_\_ 8

*Signature* Dennis L. Gaylord Title PLS 1636 Division 7-2-82 Headquarters Date 7-2-82 4  
5

**CORNER RECORD (PERPETUATION)**

**MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT**

**ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE**

Work Done By \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_ State Registration No. \_\_\_\_\_  
or Agency \_\_\_\_\_

Certified Cor. Record Prepared ? Yes No Filed At: \_\_\_\_\_ Date \_\_\_\_\_

**REMARKS**

Index File No. T. R. M. Tract or Surv. No. Cor.